

# COMPARISON OF FUEL CONSUMPTION AND RECOVERABLE ENERGY ACCORDING TO NEDC AND WLTP CYCLES OF A VEHICLE

## ■ COMPARACIÓN DEL CONSUMO DE COMBUSTIBLE Y LA ENERGÍA RECUPERABLE SEGÚN LOS CICLOS NEDC Y WLTP DE UN VEHÍCULO

M-Ihsan. Karamangil, Merve. Tekin <sup>a</sup>

### ABSTRACT

Since 1997, the NEDC (New European Driving Cycle) has been used to measure CO<sub>2</sub> emissions. However, because this cycle is unable to accurately replicate real-world driving conditions, a new procedure has been developed. The WLTP (Worldwide Harmonised Light Vehicles Test Procedure), which is 10 minutes longer and more dynamic than NEDC, has been used since late 2017. In this paper, fuel consumption, CO<sub>2</sub> emissions, and energy demand of these two cycles are compared. The vehicle mathematical model was created in a MATLAB program using vehicle longitudinal motion equations for a light commercial vehicle with a diesel engine. The speed profiles of the commonly used NEDC and WLTP cycles were defined in the model, and the fuel consumption, CO<sub>2</sub> emission values, and the total energy values required for each cycle were calculated. Furthermore, the recoverable energy potential of the cycle has been revealed. According to the WLTP cycle, the vehicle's fuel consumption and CO<sub>2</sub> emission values were calculated at approximately 11% more than the NEDC cycle. The recoverable energy potential is 2.64 times higher in the WLTP cycle compared to the NEDC cycle. Thus, for vehicle designers, it is a very useful tool that can calculate the fuel and CO<sub>2</sub> consumption of a vehicle in 100 km according to certain cycles, based on vehicle parameters.

### RESUMEN

Desde 1997, el NEDC se ha utilizado para medir las emisiones de CO<sub>2</sub>. Sin embargo, debido a que este ciclo no puede replicar con precisión las condiciones de conducción del mundo real, se ha desarrollado un nuevo procedimiento. El WLTP, que es 10 minutos más largo y dinámico que el NEDC, se utiliza desde finales de 2017. En este estudio se comparan el consumo de combustible, las emisiones de CO<sub>2</sub> y la demanda de energía de estos dos ciclos. El modelo matemático del vehículo se creó en el programa MATLAB utilizando ecuaciones de movimiento longitudinal del vehículo para un vehículo comercial ligero con motor diésel. Los perfiles de velocidad de los ciclos NEDC y WLTP comúnmente utilizados se definieron en el modelo, y se calcularon los valores de consumo de combustible, emisiones de CO<sub>2</sub> y energía total requerida para cada ciclo. Además, se ha revelado el potencial energético recuperable del ciclo. Según el ciclo WLTP, los valores de consumo de combustible y emisiones de CO<sub>2</sub> del vehículo se calcularon aproximadamente un 11% más que el ciclo NEDC. El potencial energético recuperable es 2.64 veces superior en el ciclo WLTP respecto al ciclo NEDC. Por lo tanto, para los diseñadores de vehículos, una herramienta muy útil que puede calcular el consumo de combustible y CO<sub>2</sub> de un vehículo en 100 km según ciertos ciclos utilizando los parámetros del vehículo.

### KEYWORDS / PALABRAS CLAVE

NEDC | WLTC | WLTP | fuel consumption | CO<sub>2</sub> emissions | recoverable energy  
NEDC | WLTC | WLTP | el consumo de combustible | emisiones de CO<sub>2</sub> | energía recuperable

### AFFILIATION

<sup>a</sup>Bursa Uludag University Turquia  
\*email: [mervetekin@uludag.edu.tr](mailto:mervetekin@uludag.edu.tr)

## 1. INTRODUCTION

The Economic European Community first started taking measures to reduce vehicle air pollution in 1970, and with new regulations, it has defined various test types, methods, and technical specifications for measuring exhaust gas emissions. Later, vehicle-borne air pollution legislation was introduced as the EURO emission standard in 1991, coming into force in July 1992 as EURO 1.

The New European Driving Cycle (NEDC) took its final form in 1997, as a standard driving cycle still relevant today. This driving cycle is an 11 km long cycle consisting of 4 urban cycles and an extra-urban cycle. The speed profile in the driving cycle is tracked exactly by the driver in the vehicle on the chassis dynamometer. Changes in the vehicle's speed, acceleration, and gear changes should be within specified tolerances. Before testing, the vehicle must be preconditioned in a 20-30 °C ambient temperature for at least 6 hours to ensure that the coolant and engine oil are within these temperature range. Gases from the exhaust pipe are collected in one or more bags by the constant volume sampling (CVS) method while the vehicle is running, and subsequently analyzed following a rigorous procedure. According to this cycle, emission amounts such as CO, NO<sub>x</sub>, HC, and particulate matter per kilometer (g/km) are calculated to compare with EURO standards. NEDC cycle is a reference cycle used up to Euro 6 in Europe and some other countries [1-5].

The document containing fuel consumption values and emission values obtained from the NEDC cycle for each vehicle is publicly available, and it is used in the eco-label created for the users to opt for a vehicle. However, there are significant differences between fuel consumption and emission values obtained in real road conditions and homologation values. These differences are reported in many studies. Tzirakis et al. [6] compared a typical Athens cycle with the NEDC cycle and found a 56-79% increase in fuel consumption. The same trend of fuel consumption increase has been observed in CO<sub>2</sub> emissions in their study. While NO<sub>x</sub> emissions increased by 300% on a g/km basis, a 132% increase was observed in CO emissions, and there was no change in HC emissions.

The differences between real road driving cycles and NEDC can translate into 12-30% more fuel consumption and 32.2-62.83% more real road cycles in NO<sub>x</sub> emissions [7].

Three vehicles with EURO 2, EURO 3, and EURO 4 were subjected to ECE and EUDC driving cycles on the chassis dynamometer and the results were compared to the Belgian MOL driving cycle [8]. A similar conclusion has been reached in this study. In this driving cycle, an increase between 15% and 25% in fuel consumption and CO<sub>2</sub> emissions of EURO 3 and EURO 4 vehicles was observed. Significantly different results were also obtained for CO and NO<sub>x</sub> emissions.

In a study published by the European Commission Joint Research Center, the type approval certificate data were compared with real road data using fuel consumption values from various studies such as the Artemis project, ADAC (Allgemeiner Deutscher Automobil-Club) organization in Germany, automotive magazines [9]. It was determined, as a result of the study, that the fuel consumption values stated in the certification are 10-15% below the real values, and 12-20% less in diesel vehicles.

While a typical gasoline vehicle performs the NEDC cycle, it runs below 2500 rpm at 90% of the cycle, and spends 85% of its time to

overcome the wheel power below 10 kW [10]. Hence, the engine/vehicle is effectively tested in a small operating range. Therefore, the NEDC cycle is defined as a low-load driving cycle that only allows for effective testing in a narrow working range [11]. The cycle does not reflect the actual driving conditions: accelerations are very soft, idling times are high, and situations with constant speed are more than necessary.

Based on the foregoing, a search for a driving cycle that could replace the NEDC started recently. Also, the diesel emission scandal arisen in 2015 resulted in pressure on the new cycle. The WLTP (Worldwide Harmonised Light Vehicles Test Procedure) and the WLTC (Worldwide Harmonized Light vehicles Test Cycles) are global accepted standards developed to determine pollutant levels, CO<sub>2</sub> emissions, and fuel consumption of classic and hybrid electric vehicles, and the ranges of purely electric vehicles. This new protocol was developed and launched in 2015 by the United Nations Economic Commission for Europe (UNECE) to achieve fuel consumption and emission values closer to real road driving conditions in laboratory tests. Thus, the WLTP has been replaced by the NEDC cycle as the European vehicle approval procedure [12,13]. The new standard cycle is designed to better represent today's real driving conditions. To achieve this goal, a speed profile with longer, more dynamic, faster acceleration, and short braking times was developed in WLTP vs. NEDC. Thus, a driving cycle of 23.25 km in length was achieved, with an average speed of 46.5 km/h, and a maximum speed of 131.3 km/h.

The main differences between the old NEDC and the new WLTP test, or the basic features of WLTP are:


- Average and maximum speeds are higher in WLTP;
- WLTP consists of a wider range of driving conditions such as urban, highway, suburban;
- WLTP has a longer distance;
- It has a higher average and maximum driving power;
- Steep accelerations and decelerations;
- Allows testing optional equipment individually;
- Offers hot and cold engine operating conditions.

In this study, the vehicle mathematical model was created in a MATLAB program using vehicle longitudinal motion equations for a light commercial vehicle with a diesel engine. The speed profiles of NEDC and WLTP cycles are defined in the model, and the fuel consumption, CO<sub>2</sub> emission values, and total energy values required for each cycle are calculated. Further, the recoverable energy potentials of the cycles have been revealed. The results were achieved after considering the fuel cut-off and start-stop strategies proposed in the modelling to improve fuel economy. Thus, it proposes a comparison of the WLTP cycle that has just been introduced and the classical NEDC cycle for a vehicle.

## 2. MATERIAL AND METHOD

### MATHEMATICAL MODEL OF THE VEHICLE

There are two approaches as a forward and backward vehicle model for modelling of a vehicle. In the forward vehicle models, the input signal is a force applied on the accelerator or brake pedal. In the backward vehicle model, the input is a driving cycle. The required power and torque at wheels are calculated according to the defined driving cycle. Then, they propagated back to the power

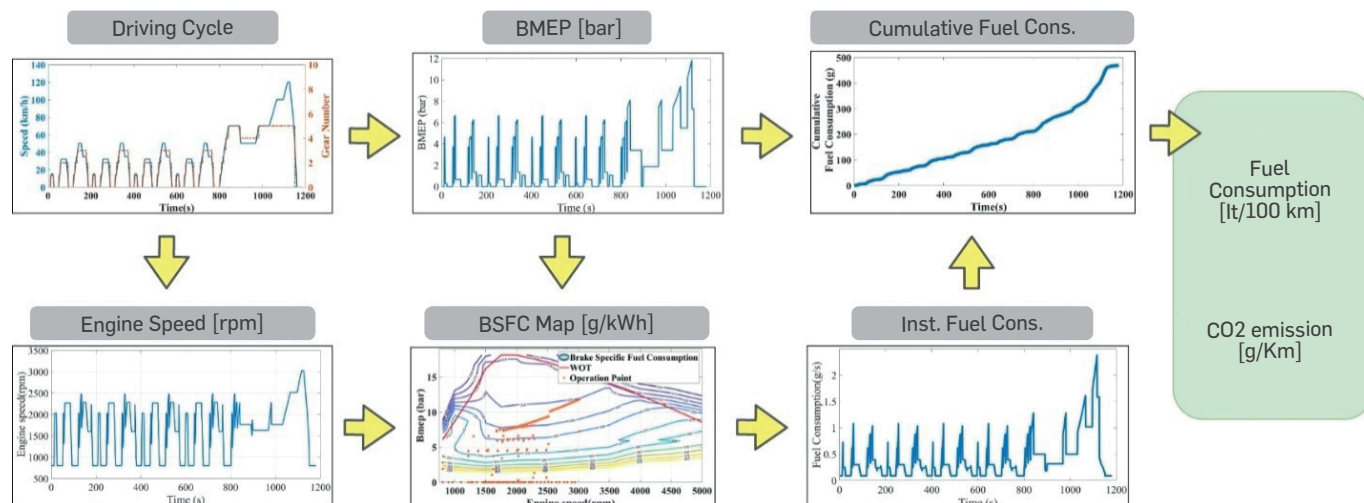

**Figure 1.** Figure 1. Calculation of fuel consumption with a backward vehicle model

source (Internal Combustion Engine/ICE) through the drivetrain. This approach is suitable for determining the power and energy required in a driving cycle [14].

This paper compared the fuel consumption and energy need of the vehicle considering the NEDC and WLTP driving cycles, which are the most known. The backward vehicle model was created in MATLAB. The driving cycles were defined as a look-up table, and imported to the model. In the first column of the lookup table, time was defined at one-second intervals; vehicle speed and gear position were also defined in the second and third columns. After calculating the traction force required to overcome resistance forces, the engine effective power was calculated, taking into account the efficiency of the driveline. The parameters used in this study are shown in Table 1. The vehicle considered is a light commercial vehicle with a 1.3 lit diesel engine.

Figure 1 shows the flow chart of the fuel consumption model. Instantaneous fuel consumption was calculated by interpolation from a specific fuel consumption map of the engine, and total fuel consumption, traction energy, and braking energy were calculated for both driving cycles.

In the brake specific fuel consumption (bsfc) map of the engine, the horizontal axis is engine revolution (rpm), and the vertical axis is brake mean effective pressure (bmeep). To read instantaneous fuel consumption on the map, the current speed and the bmeep value of the engine must be known. Engine speed is calculated depending on the wheel speed and gear ratio (Equation 1). The bmeep is calculated using the engine's revolution and effective power, as shown in Equation 2. The engine effective power is also calculated as shown in Equation 3. All the following equations are taken from [15].

$$n(t) = \frac{v(t) \left[ \frac{km}{h} \right]}{3.6} \cdot \frac{i_g i_d}{2\pi R_w [m]} \quad [rpm] \quad (1)$$

where  $v$  is the wheel speed,  $R_w$  is the wheel radius,  $i_g$  and  $i_d$  are gear ratios of the gearbox and differential, respectively

$$bmeep = \frac{1200 P_e}{n V_H} \quad (2)$$

**Table 1.** Parameters used in the model

Vehicle Parameters		
Parameter	Value	Unit
Vehicle curb mass	1345	kg
Frontal area	2.7	m <sup>2</sup>
Drag coefficient	0.38	-
Wheel Radius	0.31	m
Engine displacement	1.248	lt
Idling speed	800	rpm
Polar moment of inertia of wheels and axles	3.6248	kgm <sup>2</sup>
Polar moment of inertia of ICE	0.2041	kgm <sup>2</sup>
Gearbox Ratios		
I	4.273	-
II	2.238	-
III	1.444	-
IV	1.029	-
V	0.795	-
Differential	3.818	-
Fuel Parameters		
Density of diesel fuel	0.835	kg/lt
Idle fuel consumption	0.315	kg/h
Environment Parameters		
Air density	1.226	kg/m <sup>3</sup>
Gravitational acceleration	9.81	m/s <sup>2</sup>
Wind speed	0	km/h
Road slope angle	0	0

where  $P_e$  is the effective power of the engine (kW),  $n$  is engine revolution (rpm),  $V_H$  is engine displacement (lt). The effective power of the engine can be calculated using traction force ( $F_{traction}$ ) and motor angular velocity ( $\omega$ ) from Equation 3.

$$P_e = \frac{T_e \omega}{1000} = \frac{T_e 2\pi n}{1000.60} = \frac{F_{traction} R_w}{\eta_t i_g i_d} \frac{2\pi n}{1000.60} [kW] \quad (3)$$

where  $T_e$  and  $\eta_t$  are engine torque (Nm) and efficiency of driveline, respectively. The traction force at wheels is calculated with Equation 4. Terms in the equation are rolling resistance, slope resistance, aerodynamic resistance, and inertial force, respectively. The sum of these forces is the given traction force at wheels. The traction force was calculated for a road without slope and wind.

$$F_{traction} = \mu m_v g \cos(\alpha) + m_v g \sin(\alpha) + \frac{1}{2} \rho C_d A_f \left( \frac{v + v_w}{3.6} \right)^2 + m_{eq} a \quad (4)$$

where  $F_{traction}$  is traction force at wheels (N),  $\mu$  is the rolling resistance coefficient,  $m_v$  is vehicle weight (kg),  $g$  is the gravitational acceleration ( $m/s^2$ ),  $\alpha$  is the slope angle of the road,  $\rho$  is the density of air ( $kg/m^3$ ),  $C_d$  is drag coefficient,  $A_f$  is the frontal area ( $m^2$ ),  $v$  and  $v_w$  are vehicle and wind speed, respectively ( $m/s$ ),  $m_{eq}$  is the equivalent mass of the vehicle (kg),  $a$  is acceleration ( $m/s^2$ ). The rotating parts such as crankshaft, transmission primary and seconder shafts, differential, and wheels, also affect vehicle performance while the vehicle's is moving. Therefore, an equivalent mass (Equation 5) is calculated by reducing the inertia forces of these parts to the wheel axis.

$$m_{eq} = m_v + \frac{J_e}{R_w^2} i_g^2 i_d^2 + \frac{J_p}{R_w^2} i_g^2 i_d^2 + \frac{J_s}{R_w^2} i_d^2 + \frac{J_a}{R_w^2} + \sum \frac{J_w}{R_w^2} \quad (5)$$

where  $m_v$  is vehicle mass.  $J_e$ ,  $J_p$ ,  $J_s$ ,  $J_d$ , and  $J_w$  are rotational inertias of the engine, the primary shaft of the gearbox, the secondary shaft of the gearbox, differential, and wheel, respectively.  $i_g$  is the ratio of the gearbox, and  $i_d$  is the ratio of the final drive, and  $R_w$  is also the radius of the tire.

Based on the above equations, after calculating the engine speed and bmep depending on the driving cycle, the instantaneous fuel consumption ( $\dot{m}$ ) can be read from the engine map. The cumulative fuel consumption is also calculated as shown below.

$$V_{fuel} = \frac{\frac{1}{3600} \sum \dot{m}(n, bmep) 100}{\rho_{fuel} D} [lt/100 km] \quad (6)$$

where  $V_{fuel}$  is the amount of fuel consumed in 100 km on lt basis,  $\dot{m}$  is instantaneous fuel consumption ( $kg/h$ ),  $\rho_{fuel}$  is the density of fuel ( $kg/lt$ ), and  $D$  is the distance of the driving cycle (km). During the driving cycle, the amount of  $CO_2$  released can be obtained from Equation 7. This equation is given for diesel fuel.

$$m_{CO_2} = \frac{v_{fuel} \left( \frac{lt}{100 km} \right) \rho_{diesel} \left( \frac{kg}{lt} \right)}{0.0317} [g/km] \quad (7)$$

Traction energy and braking energy are calculated by interpolating the engine power as shown in Equation 8 and 9, respectively.

$$E_{traction} = \int P_{e,a} > 0 dt [kJ] \quad (8)$$

$$E_{braking} = \int P_{e,a} < 0 dt [kJ] \quad (9)$$

where  $E_{traction}$  and  $E_{braking}$  are traction energy and braking energy, respectively.  $P_{e,a} > 0$  engine power at acceleration,  $P_{e,a} < 0$  is the engine power at deceleration.

## COMPARISON OF NEDC AND WLTP DRIVING CYCLES

To evaluate the performance criteria of vehicles such as fuel consumption and emissions, different driving cycles are developed and standardized. One of the most widely used of these cycles is NEDC. NEDC was developed in 1980. It consists of an urban cycle repeated four times, followed by an extra-urban cycle. While the urban cycle is characterized by low speed and low engine load, the extra-urban driving cycle is characterized by a relatively higher speed and more aggressive driving. Because it is simple and has several stable driving modes, NEDC is a repeatable driving cycle. However, it does not represent real driving current performance, so it does not reflect real fuel consumption values and emissions [16]. In 2009, a project was launched by the United Nations Economic Commission for Europe (UNECE) to develop a harmonized driving cycle and test procedure [17]. Within this paper's scope, the Worldwide Harmonised Light Vehicle Test Procedure (WLTP), created by collecting real driving data worldwide, with a more realistic speed profile, was developed and implemented in 2017 [18]. The WLTP driving cycle consists in four different speed profiles, i.e. low, medium, high, and extra high. This newly developed driving cycle is more dynamic and longer than NEDC. The comparison of NEDC and WLTP cycles is shown in Figure 2 and Table 2.

A vehicle completes only 13% of the WLTP cycle at idle speed, 4% at a constant speed, and 84% of the cycle in accelerated motion. In the NEDC cycle, the vehicle completes the cycle by moving 36% of the cycle with accelerated motion, 24% at idle speed, and 40% with constant speed [17].

Table 2. Basic parameters of NEDC and WLTP

Parameter	NEDC	WLTP
Time(s)	1180	1800
Distance (km)	11.03	23.27
Maximum speed (km/h)	120	131.3
Average speed (km/h)	33.6	46.5
Maximum acceleration ( $m/s^2$ )	1.04	1.67
Mean acceleration ( $m/s^2$ )	0.59	0.41
Minimum deceleration ( $m/s^2$ )	-1.39	-1.50
Mean deceleration ( $m/s^2$ )	-0.82	-0.45
Constant driving percentage (%)	40.3	3.7
Stop duration percentage (%)	23.7	12.6
Percentage of acceleration (%)	20.9	43.8
Percentage of deceleration (%)	15.1	39.9

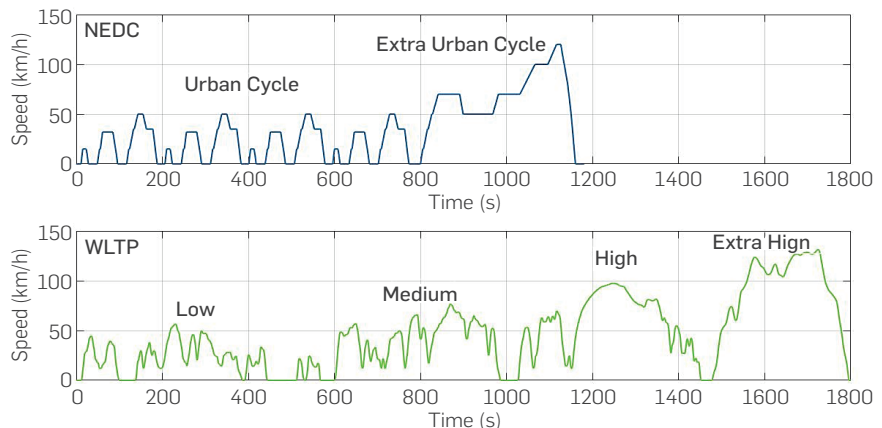


Figure 2. Speed profiles of NEDC and WLTP [5]



The differences between NEDC and WLTP are not only duration and speed profiles. Another significant difference is vehicle test masses. UNECE Nu.83 regulation is used to determine NEDC vehicle test mass, and UNECE GTR Nu.15 regulation is used to determine WLTP vehicle test mass [19]. In chassis dynamometer tests performed according to the NEDC cycle, the vehicle is tested only with standard equipment. The test mass is the sum of the vehicle's curb weight and driver weight. In the WLTP cycle, tests must be conducted on a fully equipped vehicle, including all equipment that is not included in the standard vehicle but can be added depending on the driver's request [20], and there are two different test mass definitions according to the "optional equipment" weight: Low Test Mass (TML) and High Test Mass (TM<sub>H</sub>). The difference is that optional equipment weight at high test mass is included, while optional equipment weight at low test mass is not included. High Test Mass (TM<sub>H</sub>) is mainly used in WLTP tests. These masses can be obtained from the sum of the components in Equations 10 and 11 [19].

$$TM_H = m_r + 25 + m_{equip.} + 0.15 (m_{max} - (m_r + 25 + m_{equip.})) \quad (10)$$

$$TM_L = m_r + 25 + 0.15 (m_{max} - (m_r + 25 + m_{equip.})) \quad (11)$$

Here,  $m_r$  consists of vehicle mass equipped with standard equipment, driver's weight, and the fuel tank weight of 90% full;  $m_{equip.}$  is the weight of optional equipment. It is difficult to determine the equipment's weight accurately, but Ligterink et al. [19] says that the optional equipment weight could be considered between 50 and 225 kg. Also,  $m_{max}$  is the maximum weight of the vehicle. In this study, the test weight for the WLTP cycle was calculated according to TM<sub>H</sub>, and the optional equipment weight was accepted as 200 kg.

### 3. MODEL VALIDATION


For model verification, the results of the model and test values of the vehicle were compared in Table 3. The differences between modelling and test values are acceptable. The described model is suitable for providing reliable values of vehicle fuel consumption, even when cold start cycles are considered. The main uncertainty stems from the "driver effect", which is an uncertainty also during experimental tests.

**Table 3.** The differences between test and modelling results

	Test	Modeling	Δ %
UDC (lt/100km)	6.00	5.86	-2.33
EUDC (lt/100km)	4.30	4.43	3
NEDC (lt/100km)	4.90	4.96	1.22
CO <sub>2</sub> emissions (gr/km)	129	131.5	1.94

## 4. RESULTS

The traction force graphs required by the vehicle during the NEDC and WLTP cycles are shown in Figure 3. It was mentioned in Section 2 that the traction force applied from the wheels for the movement of the vehicle varies depending on the resistance forces and the inertia force of the vehicle. The test mass used in the WLTP cycle is higher than the mass in the NEDC cycle. Therefore, this affects the rolling resistance and the inertia of the vehicle directly. Thus, it is observed that the maximum traction force values in the acceleration and deceleration in the graphics are higher in WLTP. In the last phase of the WLTP cycle, the inertia is lower as the vehicle moves with low accelerations in the 5<sup>th</sup> gear. Therefore, lower traction force values were obtained. While the highest traction force required by the vehicle in the NEDC cycle is 2268.3 N, it can go up to 4091.6 N in the WLTP cycle.

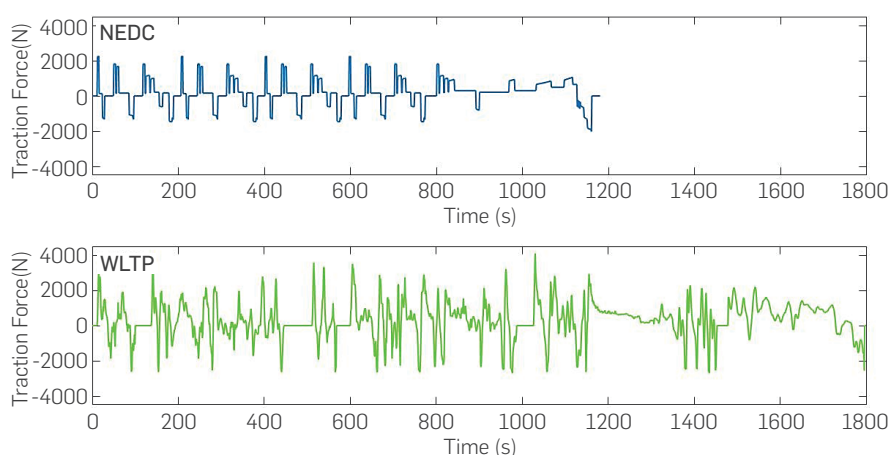

**Figure 3.** Traction force vs. time according to NEDC and WLTP

When the instantaneous traction power values of the vehicle during both cycles are analyzed, it is observed that the highest values are obtained in the extra high phase region of WLTP and the extra-urban driving cycle of NEDC (Figure 4). As with the traction force graph, the maximum traction power values in the WLTP cycle are higher than in the NEDC cycle, as it travels at relatively higher speeds. While the highest traction power required by the vehicle in the NEDC cycle is 35.31 kW, it can go up to 51.3 kW in the WLTP cycle.

Figure 5 shows instantaneous fuel consumptions. Since the fuel cut-off and start-stop strategies are considered, fuel consumption is zero when the vehicle speed is zero (start-stop strategy), the engine speed is over 1000 rpm, and the accelerator pedal released (fuel cut-off strategy). As expected, instantaneous fuel consumption is higher in regions with high traction power. The highest value of instantaneous fuel consumption is 2.4 g/s in NEDC and is 3.0 g/s in WLTP. Also, the cumulative fuel consumption for both cycles is that shown in Figure 5. During the NEDC cycle, 423.22 g of fuel was consumed, and 1070.8 g of fuel was consumed during the WLTP cycle. These fuel consumption values are obtained in hot engine conditions.

In the energy graph in Figure 6, the blue-colored regions show the energy values at positive acceleration and constant speed points. The red-colored regions show the energy values during braking. Regenerative braking systems recover the part of the braking energy in electric vehicles, but this energy is lost as friction and heat in conventional vehicles. Nevertheless, even in some classic vehicles, braking energy can be used to charge the battery. In these vehicles with a smart charging system, the alternator is operated with braking energy, and it benefits from this energy.

The total amount of energy required during the cycle was 6.21 MJ in the NEDC cycle and 18.43 MJ in the WLTP cycle. In Table 4, all values are high for the WLTP cycle. This is because the WLTP cycle runs at higher speeds, and the test mass in WLTP is heavier than in the NEDC. The expected result is that the energy and CO<sub>2</sub> emission values obtained will be higher in the WLTP cycle due to the different cycle distances. Hence, to make a more accurate comparison, the energy values are given in MJ/km in the table.

## CONCLUSIONS

In this study, the vehicle mathematical model was created in a MATLAB program for a light commercial vehicle with diesel engine, and then fuel consumption, CO<sub>2</sub> emission values, and energy need were calculated for the NEDC and WLTP cycles. The findings obtained at the end of the study can be summarized as follows.

■ When the traction energies of the cycles are compared, 45% more energy is consumed in the WLTP cycle relatively to the NEDC cycle.


■ 81% of the total energy in the WLTP cycle is used for traction, while the remaining 19% is spent for braking. In the NEDC cycle, 78% of the energy is used for traction and 22% for braking.

■ When the average energy values are compared, the vehicle needs to spend 45% more energy than the NEDC cycle in the WLTP cycle. When the average braking energy values are compared, an increase of 25% is observed.


■ Braking energy in ICE vehicles can be recovered by using mechanical KERS (Kinetic Energy Recovery System) based on the vehicle's inertia. The WLTP cycle provides more advantages in energy recovery during braking due to inertia forces and higher braking energy.

■ CO<sub>2</sub> emission of a diesel vehicle with active fuel cut-off and start-stop strategies is 11% higher in the WLTP cycle. Although the total emission amounts are higher in the WLTP cycle, since the distance is longer, the effect of cold start on CO<sub>2</sub> emissions in the WLTP cycle is less than in the NEDC cycle.

■ In recent years, tests to measure the fuel consumption and emissions of vehicles in real road conditions have become as

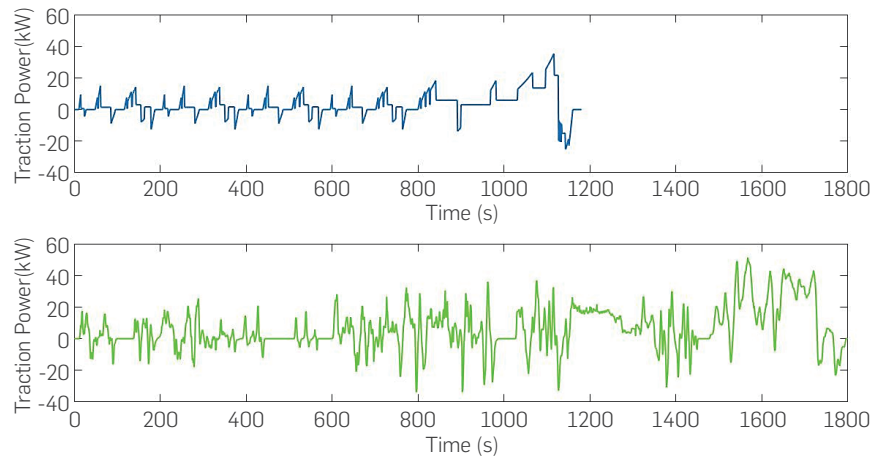

**Figure 4.** Traction power vs. time according to NEDC and WLTP

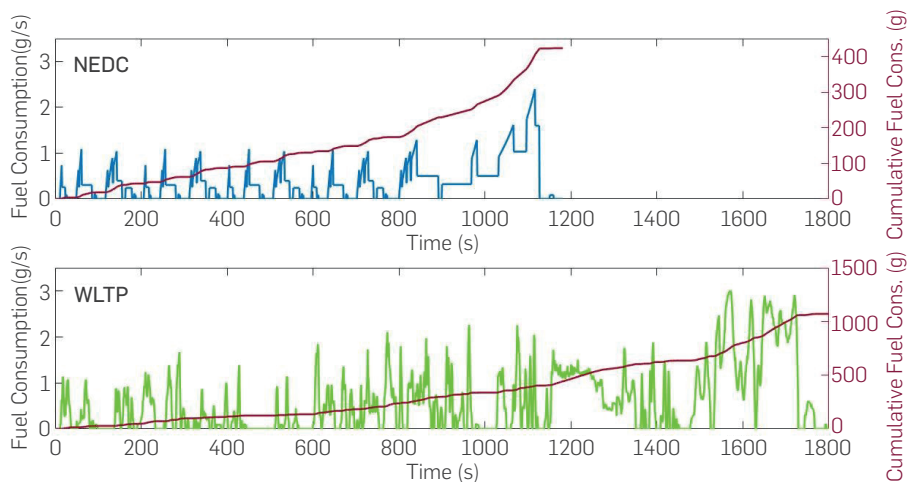

**Figure 5.** Instantaneous fuel consumptions of NEDC and WLTP

**Table 4.** Fuel consumptions and energy value obtained in this paper

	NEDC	WLTP	Δ %
Fuel Consumption (lt/100km)	4.96	5.51	11
CO <sub>2</sub> emissions (g/km)	131.48	146.1	11
Traction energy (MJ)	4.86	14.87	45
(MJ/km)	0.44	0.64	
Braking energy (MJ)	1.35	3.56	25
(MJ/km)	0.12	0.15	

important as laboratory tests. There are some difficulties such as the fact that RDE (Real Driving Emissions) tests are more comprehensive and take longer than laboratory tests, the risks that may be encountered in real road conditions while performing the test, and the inability to test in difficult road and weather conditions, plus the waste of effort and time in possible test cancellations. Presumably, in the future, representation of real road tests under

laboratory conditions can be considered. Thus, although the WLTP test does not meet the values in real road conditions, it is relevant in terms of giving values closer to it, allowing for a correlation between laboratory and real road tests.

Test initial conditions are similar for both cycles, but in the WLTP cycle, the vehicle test mass is heavier, and road loads are more

realistic. The vehicle travels at higher speeds, and the constant speed movement time accounts for only 3% of the entire cycle. This rate is much lower compared to the NEDC cycle. Therefore, the WLTP cycle provides a more dynamic speed profile, closer to real traffic conditions. Therefore, it renders more realistic and accurate results for type approval tests.

## REFERENCES

- [1] Pavlovic, J., Marotta, A., & Ciuffo, B. (2016). CO<sub>2</sub> emissions and energy demands of vehicles tested under the NEDC and the new WLTP type approval test procedures. *Applied Energy*, 177, 661-670. <https://doi.org/10.1016/j.apenergy.2016.05.110>
- [2] Dimaratos, A., Tsokolis, D., Fontaras, G., Tsiakmakis, S., Ciuffo, B., & Samaras, Z. (2016). Comparative evaluation of the effect of various technologies on light-duty vehicle CO<sub>2</sub> emissions over NEDC and WLTP. *Transportation Research Procedia*, 14, 3169-3178. <https://doi.org/10.1016/j.trpro.2016.05.257>
- [3] Taborda, A. M., Varella, R. A., Farias, T. L., & Duarte, G. O. (2019). Evaluation of technological solutions for compliance of environmental legislation in light-duty passenger: A numerical and experimental approach. *Transportation Research Part D: Transport and Environment*, 70, 135-146. <https://doi.org/10.1016/j.trd.2019.04.004>
- [4] Tsokolis, D., Tsiakmakis, S., Dimaratos, A., Fontaras, G., Pistikopoulos, P., Ciuffo, B., & Samaras, Z. (2016). Fuel consumption and CO<sub>2</sub> emissions of passenger cars over the New Worldwide Harmonized Test Protocol. *Applied energy*, 179, 1152-1165. <https://doi.org/10.1016/j.apenergy.2016.07.091>
- [5] Pavlovic, J., Ciuffo, B., Fontaras, G., Valverde, V., & Marotta, A. (2018). How much difference in type-approval CO<sub>2</sub> emissions from passenger cars in Europe can be expected from changing to the new test procedure (NEDC vs. WLTP). *Transportation Research Part A: Policy and Practice*, 111, 136-147. <https://doi.org/10.1016/j.tra.2018.02.002>
- [6] Tzirakis, E., Pitsas, K., Zannikos, F., & Stournas, S. (2006). Vehicle emissions and driving cycles: comparison of the Athens driving cycle (ADC) with ECE-15 and European driving cycle (EDC). *Global NEST Journal*, 8(3), 282-290. <https://doi.org/10.30955/gnj.000376>
- [7] Duarte, G. O., Gonçalves, G. A., & Farias, T. L. (2016). Analysis of fuel consumption and pollutant emissions of regulated and alternative driving cycles based on real-world measurements. *Transportation Research Part D: Transport and Environment*, 44, 43-54. <https://doi.org/10.1016/j.trd.2016.02.009>
- [8] Pelkmans, L., & Debal, P. (2006). Comparison of on-road emissions with emissions measured on chassis dynamometer test cycles. *Transportation Research Part D: Transport and Environment*, 11(4), 233-241. <https://doi.org/10.1016/j.trd.2006.04.001>
- [9] Mellios, G., Hausberger, S., Keller, M., Samaras, C., Ntziachristos, L., Dilara, P., & Fontaras, G. (2011). Parameterisation of fuel consumption and CO<sub>2</sub> emissions of passenger cars and light commercial vehicles for modelling purposes. *Publications Office of the European Union, EUR*, 24927. <https://doi.org/10.2788/58009>
- [10] Faernlund, J., & Engstrom, C. (2002). The possibilities of producing an engine related test cycle deriving from driving sequences in real world traffic. *VAEGVERKET PUBLIKATION*, (2002: 111). <https://trid.trb.org/view/743580>
- [11] Kågeson, P. (1998). Cycle-beating and the EU test cycle for cars. *European Federation for Transport and Environment (T&E)*, Brussels, vol. 98/3. <https://www.team-bhp.com/forum/attachments/international-automotive-scene/1418754-vags-emission-fraud-vw-cheats-emission-test-cyclebeating.pdf>
- [12] DieselNet. (13-Feb-2020). *Emission Test Cycles*. <https://dieselnet.com/standards/cycles/wltp.php>
- [13] UNECE (2008). *Status of the work of the motor industry with respect to a global technical regulation on Worldwide harmonized Light-duty Test Procedures (WLTP)*. [ARCHIVO PDF] [unece.org/https://unece.org/DAM/trans/doc/2008/wp29grpe/WLTP-01-03e.pdf](https://unece.org/DAM/trans/doc/2008/wp29grpe/WLTP-01-03e.pdf)
- [14] Ehsani, M., Gao, Y., Longo, S., & Ebrahimi, K. M. (2018). *Modern electric, hybrid electric, and fuel cell vehicles*. CRC press., (3rd ed) <https://doi.org/10.1201/9781420054002>
- [15] Mashadi, B., & Crolla, D. A. (2012). *Vehicle powertrain systems* (p. 129). London: Wiley. <https://doi.org/10.1002/9781119958376>
- [16] Tutuianu, M., Marotta, A., Steven, H., Ericsson, E., Haniu, T., Ichikawa, N., & Ishii, H. (2013). Development of a World-wide Worldwide harmonized Light duty driving Test Cycle (WLTC). *Technical Report*, vol. 03, no. January, pp. 7-10. <https://doi.org/10.1016/j.trd.2015.07.011>
- [17] Marotta, A., Pavlovic, J., Ciuffo, B., Serra, S., & Fontaras, G. (2015). Gaseous emissions from light-duty vehicles: moving from NEDC to the new WLTP test procedure. *Environmental science & technology*, 49(14), 8315-8322. <https://doi.org/10.1021/acs.est.5b01364>
- [18] European Automobile Manufacturers Association. (2018). What is WLTP and How Does It Work?. URL: <https://wltpfacts.eu/what-is-wltp-how-will-it-work/>. (Accessed: 02.01. 2020).
- [19] Ligterink, N. E., van Mensch, P., & Cuelenaere, R. F. (2016). *NEDC-WLTP comparative testing*. Delft: TNO. <https://dixi-car.pl/doc/nedc-wltp-report-tno-102016.pdf>
- [20] Mock, P., Kühnwein, J., Tietge, U., Franco, V., Bandivadekar, A., & German, J. (2014). The WLTP: How a new test procedure for cars will affect fuel consumption values in the EU. *International council on clean transportation*, 9(3547). [https://theicct.org/sites/default/files/publications/ICCT\\_WLTP\\_EffectEU\\_20141029.pdf](https://theicct.org/sites/default/files/publications/ICCT_WLTP_EffectEU_20141029.pdf)

## AUTHORS

### Merve tekin

Affiliation: Bursa Uludag University Turquia  
ORCID: <https://orcid.org/0000-0003-2831-3175>  
e-mail: [mervetekin@uludag.edu.tr](mailto:mervetekin@uludag.edu.tr)

### M-lhsan. Karamangil

Affiliation: Bursa Uludag University Turquia  
ORCID: <https://orcid.org/0000-0001-5965-0313>  
e-mail: [ihsan@uludag.edu.tr](mailto:ihsan@uludag.edu.tr)

**How to cite:** Karamangil, M.I., Tekin, M. (2022). Comparation of fuel consumption and recoverable energy according to NEDC and WLTP cycles of a vehicle. *CT&F-Ciencia, Tecnología y futuro*, 12(2), 31-38. <https://doi.org/10.29047/01225383.62>

## NOMENCLATURE

<i>ADAC</i>	Allgemeiner Deutscher Automobil-Club
<i>b<sub>mep</sub></i>	Brake mean effective pressure
<i>bsfc</i>	Brake specific fuel consumption
<i>CO</i>	Carbon Monoxide
<i>CO<sub>2</sub></i>	Carbon dioxide
<i>ECE</i>	Economic Commission for Europe
<i>EUDC</i>	Extra-Urban Driving Cycle
<i>HC</i>	Hydrocarbons
<i>ICE</i>	Internal Combustion Engine
<i>KERS</i>	Kynetic Energy Recovery System
<i>NEDC</i>	New European Driving Cycle
<i>NO<sub>x</sub></i>	Nitrogen Oxide
<i>RDE</i>	Real Driving Emissions
<i>TM<sub>H</sub></i>	High Test Mass
<i>TML</i>	Low Test Mass
<i>WLTC</i>	Worldwide Harmonized Light vehicles Test Cycles
<i>WLTP</i>	Harmonised Light Vehicles Test Procedure
<i>a</i>	Acceleration (m/s)
<i>A<sub>f</sub></i>	Frontal area (m <sup>2</sup> )
<i>C<sub>d</sub></i>	Drag coefficient (-)
<i>D</i>	Distance (km)
<i>E<sub>braking</sub></i>	Braking energy (kJ)
<i>E<sub>traction</sub></i>	Traction energy (kJ)
<i>F<sub>traction</sub></i>	Traction force (N)
<i>g</i>	Acceleration of gravity (m/s <sup>2</sup> )
<i>i<sub>d</sub></i>	Differential ratio (-)
<i>i<sub>g</sub></i>	Gear ratio (-)
<i>J<sub>d</sub></i>	Polar moment of inertia of differential (kgm <sup>2</sup> )
<i>J<sub>e</sub></i>	Polar moment of inertia of engine (kgm <sup>2</sup> )
<i>J<sub>p</sub></i>	Polar moment of inertia of primary shaft of the gearbox (kgm <sup>2</sup> )
<i>J<sub>s</sub></i>	Polar moment of inertia of secondary shaft of the gearbox (kgm <sup>2</sup> )
<i>J<sub>w</sub></i>	Polar moment of inertia of wheels (kgm <sup>2</sup> )
<i>mCO<sub>2</sub></i>	CO <sub>2</sub> emissions (gr/km)
<i>m<sub>eq</sub></i>	Equivalent mass of the vehicle (kg)
<i>m<sub>equi<sub>p</sub></sub></i>	The weight of optional equipment
<i>m<sub>r</sub></i>	Vehicle mass equipped with standard equipment, driver's weight, and the fuel tank weight of 90% full
<i>m<sub>v</sub></i>	Vehicle mass (kg)
<i>m<sup>..</sup></i>	Instantaneous fuel consumption (kg/h)
<i>n</i>	Engine speed (rpm)
<i>Pe</i>	Engine power (kW)
<i>Pe,a</i>	Engine power at acceleration (kW)
<i>R<sub>w</sub></i>	Wheel radius (m)
<i>T<sub>e</sub></i>	Engine torque (Nm)
<i>V</i>	Wheel speed (km/h)
<i>V</i>	Vehicle Speed (m/s)
<i>V<sub>fuel</sub></i>	Fuel consumption(lt/100km)
<i>V<sub>H</sub></i>	Engine displacement (lt)
<i>v<sub>w</sub></i>	Wind speed (m/s)
<i>α</i>	Road grade (degree)
<i>η<sub>t</sub></i>	Efficiency of driveline (-)
<i>μ</i>	Rolling coefficient (-)
<i>ρ</i>	Density of air (kg/m <sup>3</sup> )
<i>ρ<sub>diesel</sub></i>	Density of diesel (kg/lt)
<i>ρ<sub>fuel</sub></i>	Density of fuel (kg/lt)
<i>ω</i>	Angular speed of engine (rad/s)